



Product Family | 4055 Igniters

OTHER POPULAR NORTH AMERICAN IGNITERS

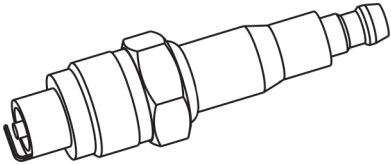


R240-2465

The R240-2465 spark plug has a 10mm thread and is used to light most North American pilots, including: 4014, 4015, 4018, 4020, 4024, 4025, 4027 and 4011 pilot sets. It is also the standard igniter used to light 4442 Tempest® burners.

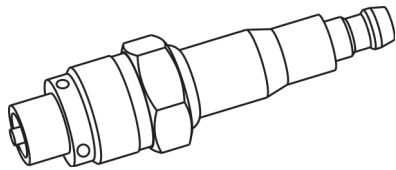

4-5635-1

The 4-5635-1 spark plug has a 10mm thread and is used to light most 4988 and 4987 Zephyr™ burners. This is a special vented spark plug made from the R240-2465 spark plug. Using an R240-2465 plug in a Zephyr™ burner will result in frequent fouling and create lighting problems.

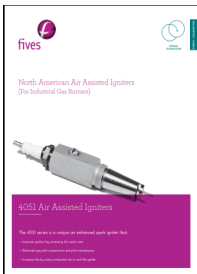


4051

The 4051 series igniters can be used as an alternative to the 4055 on some burners. It's unique air enhanced spark has the ability to increase the lighting windows typically associated with direct spark ignition. See the 4051 bulletin for application information and a list of appropriate burners.



4-3681-1

The 4-3681-1 spark plug is used to light 4723, 4725 and 4441-8 burners. The igniter should be placed in the burner so that the ground leg of the igniter is facing towards the centerline of the burner. The spark gap is 0.06". The 4-3681-1 is held into 4723 and 4441-8 burners with a yoke which is secured with a 1/4-20 flanged hex head bolt (R069-2330-C). On the 4725 a setscrew (R776-2050) holds the igniter in place.

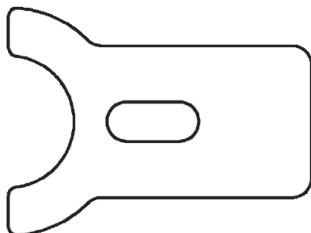

Igniter Yoke 4-27369-1

