


JET GAS

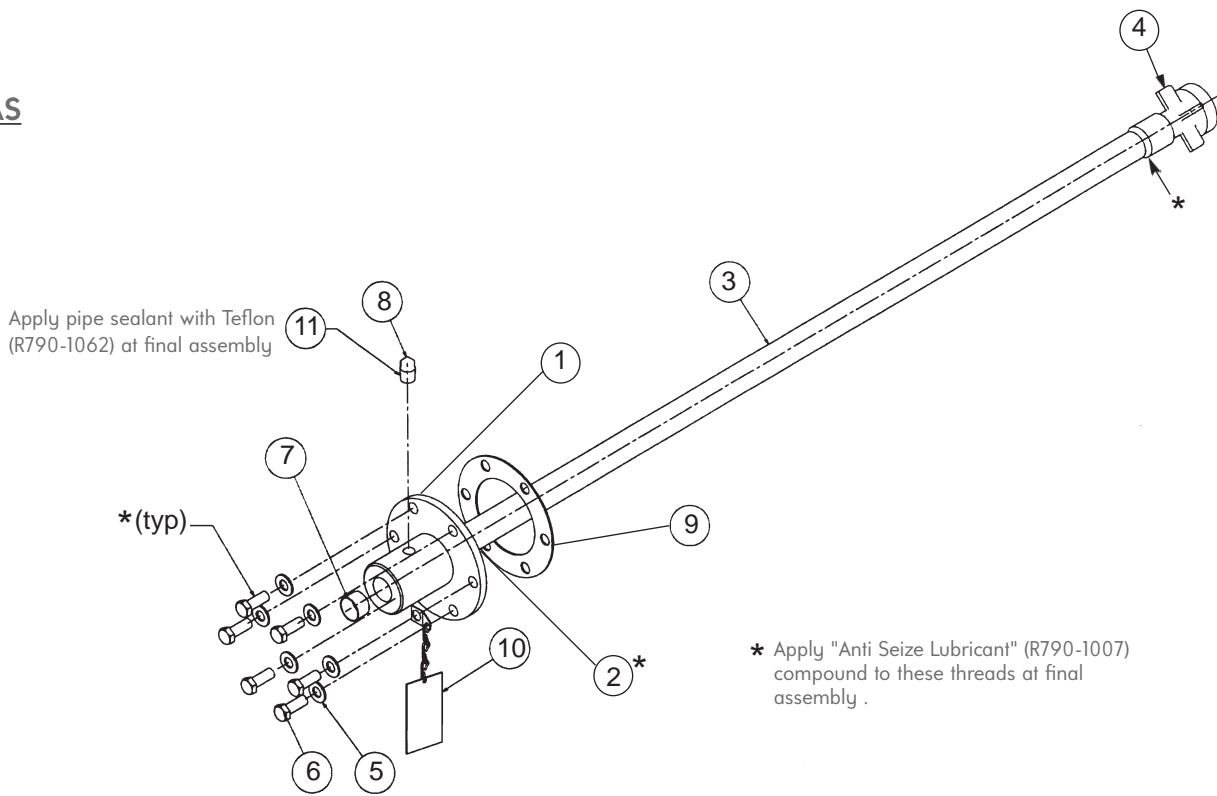

| Part Name | 4384-8 | 4384-9 | 4384-10-A | 4384-10-B | 4384-12 | 4384-14 |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| (1) Jet Gas Connection | 4-14556-1 | 4-14556-1 | 4-14556-1 | 4-14556-1 | 4-14556-1 | 4-14556-1 |
| (2) Tru-Fitting | R790-0130 | R790-0130 | R790-0130 | R790-0130 | R790-0130 | R790-0130 |
| (3) Jet Gas Tube | 4-47714-1 | 4-47580-1 | 4-47721-1 | 4-47721-1 | 4-47734-1 | 4-47749-1 |
| (4) Jet Gas Nozzle (8 psig) | 4-15306-1 | 4-15306-2 | 4-15409-1 | 4-15409-2 | 4-15409-4 | 4-15409-5 |
| (4) Jet Gas Nozzle (2 psig) | 4-15306-3 | 4-15306-4 | 4-15409-7 | 4-15409-8 | 4-15409-10 | 4-15409-11 |
| (5) 3/8" Flat Washer | R970-7295-C | R970-7295-C | R970-7295-C | R970-7295-C | R970-7295-C | R970-7295-C |
| (6) 3/8"-16 Hex Hd. Bolt | R066-2930-H | R066-2930-H | R066-2930-H | R066-2930-H | R066-2930-H | R066-2930-H |
| (7) Thread Protector | R865-0170 | R865-0170 | R865-0170 | R865-0170 | R865-0170 | R865-0170 |
| (8) 1/4" NPT Sq. Hd. Pipe Plug | R590-7820 | R590-7820 | R590-7820 | R590-7820 | R590-7820 | R590-7820 |
| (9) Jet Gas Gasket | 4-14545-1 | 4-14545-1 | 4-14545-1 | 4-14545-1 | 4-14545-1 | 4-14545-1 |
| (10) Caution Tag | 4-7161-1 | 4-7161-1 | 4-7161-1 | 4-7161-1 | 4-7161-1 | 4-7161-1 |
| (11) Pipe Sealant | R790-1062 | R790-1062 | R790-1062 | R790-1062 | R790-1062 | R790-1062 |

| Part Name | 4384-16 | 4384-18 | 4384-20 | 4384-22 | 4384-24 | 4384-26 |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| (1) Jet Gas Connection | 4-14556-1 | 4-14556-2 | 4-14556-2 | 4-14556-2 | 4-14556-2 | 4-14556-2 |
| (2) Tru-Fitting | R790-0130 | R790-0140 | R790-0140 | R790-0140 | R790-0140 | R790-0140 |
| (3) Jet Gas Tube | 4-47755-1 | 4-47761-1 | 4-47835-1 | 4-47848-1 | 4-47865-1 | 4-47932-1 |
| (4) Jet Gas Nozzle (8 psig) | 4-15409-6 | 4-15410-1 | 4-15410-2 | 4-15410-3 | 4-15410-4 | 4-15410-9 |
| (4) Jet Gas Nozzle (2 psig) | 4-15409-12 | 4-15410-5 | 4-15410-6 | N/A | N/A | N/A |
| (5) 3/8" Flat Washer | R970-7295-C | R970-7295-C | R970-7295-C | R970-7295-C | R970-7295-C | R970-7295-C |
| (6) 3/8"-16 Hex Hd. Bolt | R066-2930-H | R066-2930-H | R066-2930-H | R066-2930-H | R066-2930-H | R066-2930-H |
| (7) Thread Protector | R865-0170 | R865-0180 | R865-0180 | R865-0180 | R865-0180 | R865-0180 |
| (8) 1/4" NPT Sq. Hd. Pipe Plug | R590-7820 | R590-7820 | R590-7820 | R590-7820 | R590-7820 | R590-7820 |
| (9) Jet Gas Gasket | 4-14545-1 | 4-14545-2 | 4-14545-2 | 4-14545-2 | 4-14545-2 | 4-14545-2 |
| (10) Caution Tag | 4-7161-1 | 4-7161-1 | 4-7161-1 | 4-7161-1 | 4-7161-1 | 4-7161-1 |
| (11) Pipe Sealant | R790-1062 | R790-1062 | R790-1062 | R790-1062 | R790-1062 | R790-1062 |

WARNING: Situations dangerous to personnel and property may exist with the operation and maintenance of any combustion equipment. The presence of fuels, oxidants, hot and cold combustion products, hot surfaces, electrical power in control and ignition circuits, etc., are inherent with any combustion application. Components in combustion systems may exceed 160°F (71°C) surface temperatures and present hot surface contact hazard. Fives North American Combustion, Inc. suggests the use of combustion systems that are in compliance with all Safety Codes, Standards, Regulations and Directives; and care in operation.