


Ordering Information | Turbo Blowers

Complete information regarding the design of the blowers is available at the time of quotation including dimensional information, weight, expected sound power and a performance curve.

Series 2300 Custom blowers use the following nomenclature:

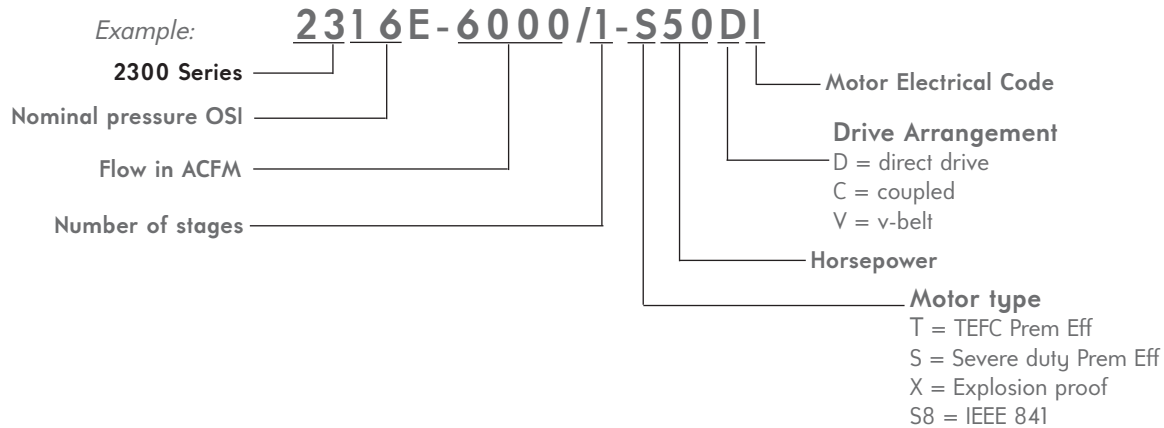

Motor Electrical Code: if this position is blank, this indicates standard voltage which for 60 Hz would be 230/460 volts 60 Hz 3 phase. Other typical electrical codes include:

A	115/230/60/1
C	230/460/60/3
D	460/60/3
F	208-230/460/60/3
I	575/60/3

For other electrical combinations, please contact Fives North American Combustion, Inc.

WARNING: Situations dangerous to personnel and property may exist with the operation and maintenance of any combustion equipment. The presence of fuels, oxidants, hot and cold combustion products, hot surfaces, electrical power in control and ignition circuits, etc., are inherent with any combustion application. Components in combustion systems may exceed 160°F (71°C) surface temperatures and present hot surface contact hazard. Fives North American Combustion, Inc. suggests the use of combustion systems that are in compliance with all Safety Codes, Standards, Regulations and Directives; and care in operation.

CONTACT

fna.sales@fivesgroup.com
T +1 800 626 3477 - F +1 216 373 4237

Fives North American Combustion, Inc.
4455 East 71st Street - Cleveland, OH 44105 - USA
www.fivesgroup.com



fives
Industry can do it