


# Dimensions | Differential Regulator

## 7458A REGULATOR SPRINGS

Outlet Pressure Range	Color	Designation	R-number
5-15 psi (standard)	Green	-01-G	R690-6810
		-0-G, -1-G	R690-6815
2-6 psi (optional)	Yellow	-01-Y	R690-6821
		-0-Y, -1-Y	R690-6791
13-30 psi (optional)	Red	-01-R	R690-6800
		-0-R, -1-R	R690-6805

### DIMENSIONS inches

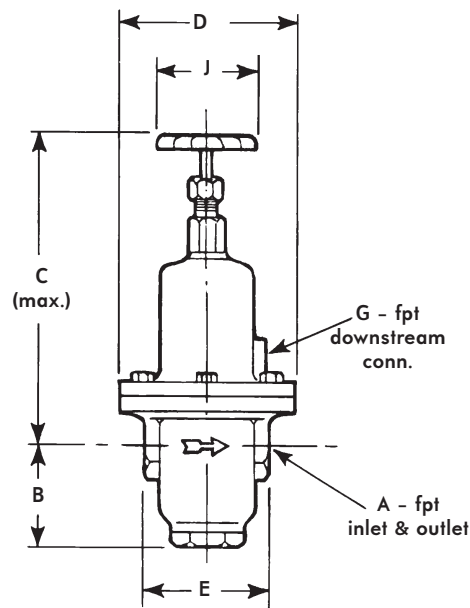

Regulator designation	dimensions in inches						
	A	B	C	D	E	G	J
7458A-01, -H	1/2	1 13/16	7 15/16	7	3 7/8	1/4	4
7458A-0, -H	3/4	2 1/4	10 1/8	10 3/16	4 7/8	1/2	4
7458A-1, -H	1	2 1/4	15 5/16	10 3/16	4 7/8	1/2	4

To order, specify: 7458A-code-(H if applicable) (spring letter)

Examples: 7458A-01-G Regulator with green spring

7458A-0-HR High Temperature Regulator with red spring

DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM FIVES NORTH AMERICAN COMBUSTION, INC. IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.

**WARNING:** Situations dangerous to personnel and property may exist with the operation and maintenance of any combustion equipment. The presence of fuels, oxidants, hot and cold combustion products, hot surfaces, electrical power in control and ignition circuits, etc., are inherent with any combustion application. Components in combustion systems may exceed 160°F (71°C) surface temperatures and present hot surface contact hazard. Fives North American Combustion, Inc. suggests the use of combustion systems that are in compliance with all Safety Codes, Standards, Regulations and Directives; and care in operation.

### CONTACT

fna.sales@fivesgroup.com

T +1 800 626 3477 - F +1 216 373 4237

Fives North American Combustion, Inc.  
4455 East 71st Street - Cleveland, OH 44105 - USA  
www.fivesgroup.com



fives  
Industry can do it