



### Dimensions (SFC)

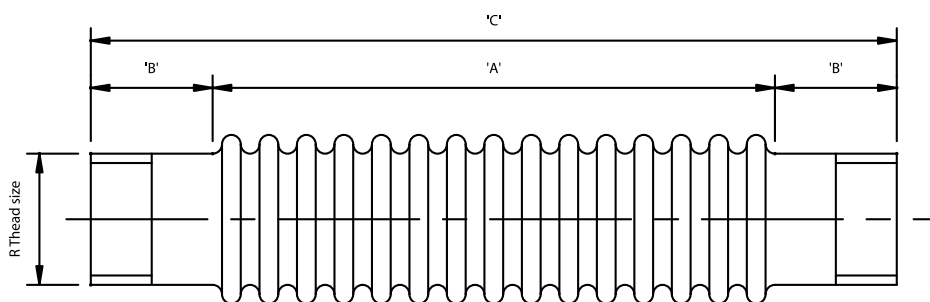

	Dimensions mm									
	SFC 15	SFC 20	SFC 25	SFC 32	SFC 40	SFC 50	SFC 65	SFC 80	SFC 100	SFC 150
Pipe size	R1/2	R3/4	R1	R1 1/4	R1 1/2	R2	R2 1/2	R3	R4	R6
Part No.	2.07.001	2.07.002	2.07.003	2.07.004	2.07.005	2.07.006	2.07.007	2.07.008	2.07.009	2.07.010
Weight (kg)	0.11	0.16	0.26	0.38	0.47	0.69	1.47	1.86	3.07	3.57
A	89	108	117	121	133	140	165	203	229	356
B	38	38	38	51	51	59	64	64	76	76
C	165	184	194	222	235	267	292	330	381	508

### Dimensions (Braided Flexible)

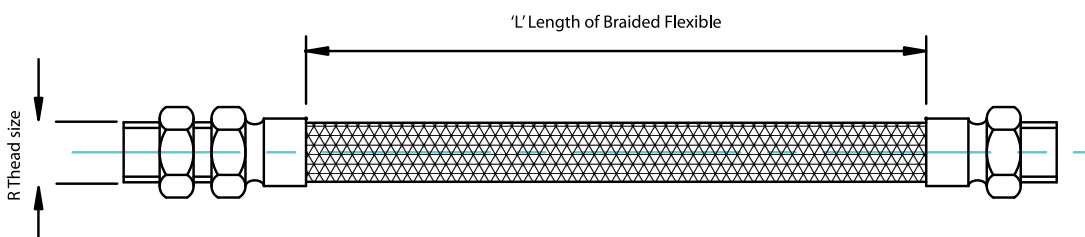

Description	R	'L' (mm)	Part No.	Weight (kg)
Flexible, Braided	1/8"	1800	1.22.066	0.18
Flexible, Braided	1/4"	300	2.10.007	0.21
Flexible, Braided	3/8"	300	2.10.008	0.28
Flexible, Braided	1/2"	300	2.10.009	0.42
Flexible, Braided	1/2"	460	1.22.067	0.5
Flexible, Braided	1/2"	610	2.10.032	0.5
Flexible, Braided	1/2"	915	1.22.068	0.8
Flexible, Braided	3/4"	460	1.22.069	0.8
Flexible, Braided	3/4"	610	2.10.033	0.8
Flexible, Braided	1"	610	SP.1838	1

**WARNING:** The data outlined is for information only and does not form part of any contract. Our policy is one of continuous improvement and we therefore reserve the right to modify specifications or dimensions without prior warning. Situations dangerous to personnel and property can develop from incorrect installation and operation of combustion equipment. Fives North American Combustion UK, Ltd urges compliance with International, National and Local Safety Standards and that installation is carried out by properly qualified personnel.

Fives North American Combustion UK, Ltd.

Heath Mill Road, Wolverhampton WV5 8BD England Tel +44 (0) 1902 891200 Fax +44 (0) 1902 895552

8/2009 SFC