


# Dimensions | 4422 Gas Burners

## CLEARANCE DIMENSIONS inches

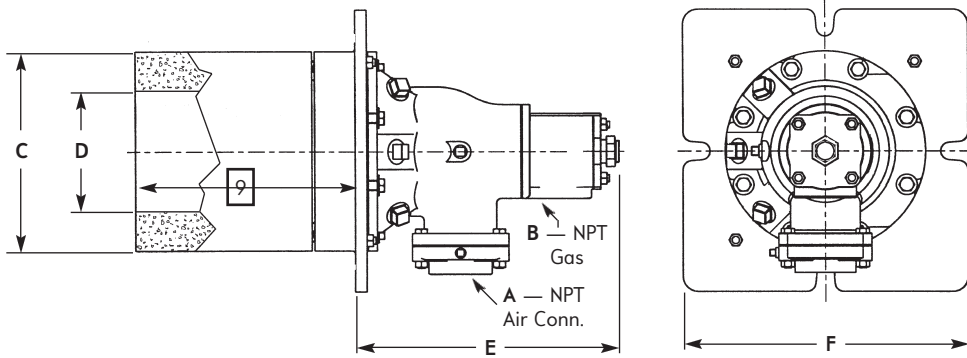

Burner designation	A	B	C	D	E	F	Std. burner weights, lb
4422-2	1¼	1	8½	5	10⅝	12	75
4422-3	1½	1	8½	5	10⅝	12	75
4422-4	2	1¼	8½	5	10⅝	12	75
4422-5	2½	1½	8½	5	10⅝	12	75
4422-6	3	1½	8½	5	10⅝	12	75
4422-6-B	3	1½	8½	5	10⅝	12	75
4422-7-A	4	2½	10	7	14⅛	13½	130
4422-7-B	4	2½	10	7	14⅛	13½	130
4422-8-A	6	2½	10	7	14⅛	13½	140

DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM FIVES NORTH AMERICAN COMBUSTION, INC. IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.

## ORDERING INFORMATION



- blank = burner with standard tile and mounting
- BO = burner only (no tile or mounting)
- Jacketed tile
  - LC = steel jacket
  - L4 = 304 SST jacket
  - L9 = 309 SST jacket
- FM = flangeless mounting
- Z = fiber wall mounting for variable wall thickness

Air pipe size	Capacities (scfh) 16 psi air
2 = 1-1/4"	1 920
3 = 1-1/2"	3 600
4 = 2"	5 500
5 = 2-1/2"	9 050
6 = 3"	14 750
6-B = 3"	17 300
7-A = 4"	27 000
7-B = 4"	32 500
8-A = 6"	43 500

- Hinged burner
  - HL = left-hand hinged burner
  - HR = right-hand hinged burner

- Double boss body
  - D = double boss body

- blank = standard burner body